


# Heat reclaim ventilation

## Ventilation with heat recovery as standard

- › **NEW** Thinnest High Efficiency Enthalpy Heat Exchanger in the market (J-series)
- › Energy saving ventilation using indoor heating, cooling and moisture recovery
- › Ideal solution for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- › Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- › Prevent energy losses from over-ventilation while improving indoor air quality with optional CO<sub>2</sub> sensor
- › **NEW** Possibility to change ESP via wired remote control allows optimisation of the supply air volume (J - series)
- › Can be used as stand alone or integrated in the Sky Air or VRV system
- › Wide range of units: air flow rate from 150 up to 2,000 m<sup>3</sup>/h
- › Optional medium and fine dust filters M6, F7, F8 to meet customer request or legislation
- › Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation.

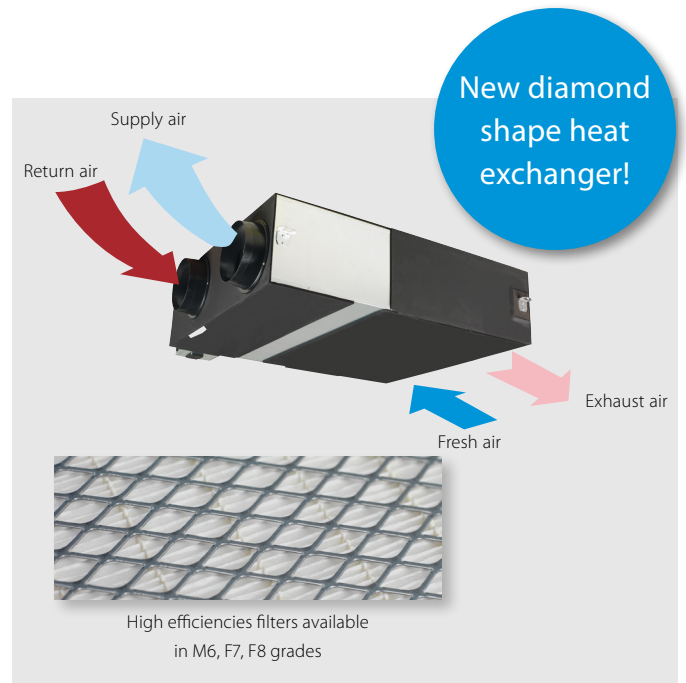


- › No drain piping needed
- › Can operate in over- and under pressure
- › Total solution for fresh air with Daikin supply of both VAM / VKM and electrical heaters


## Prevent energy losses from over ventilation with CO<sub>2</sub> sensor

Enough fresh air is needed to create an enjoyable environment, but ventilating constantly is leading to energy waste. Therefore an optional CO<sub>2</sub> sensor can be installed which throttles or even switches off the ventilation system when there is enough fresh air in the room, thus saving energy.

### Example of CO<sub>2</sub> sensor operation in a meeting room:

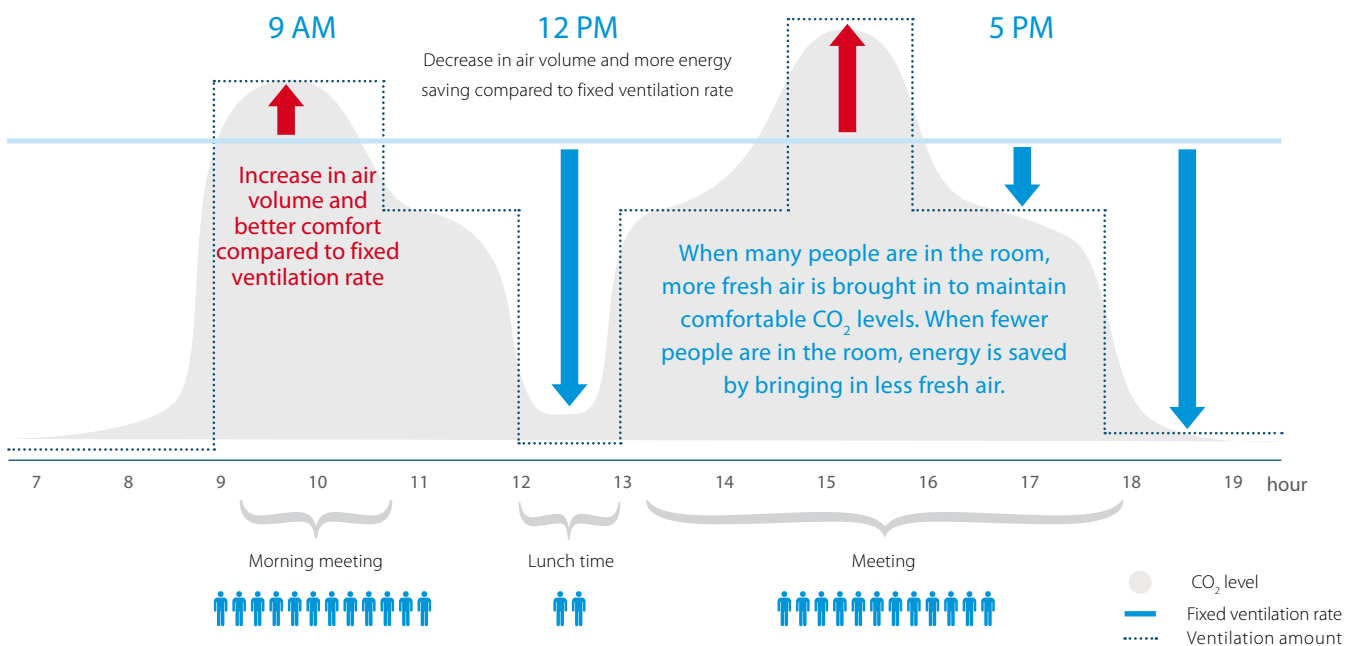

Using CO<sub>2</sub> sensors has the most energy-saving potential in buildings where occupancy fluctuates during a 24-hour period, is unpredictable and peaks at a high level. For example office buildings, government facilities, retail stores and shopping malls, movie theaters, auditoriums, schools, entertainment clubs and nightclubs. The ventilation unit's reaction to fluctuations in CO<sub>2</sub> can be easily adjusted through a field setting.


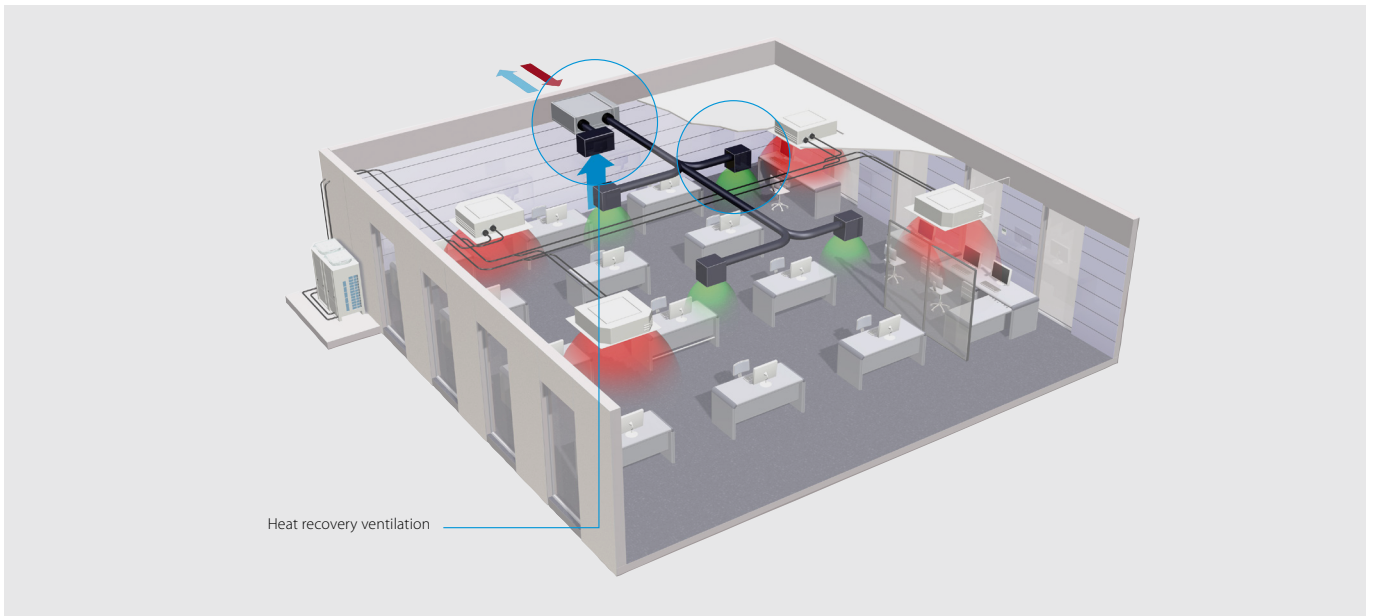


Heat recovery ventilation

## High efficiency Paper Heat Exchanger

Operation of the high efficiency paper heat exchanger.

Cross flow of air to exchange heat and moisture.

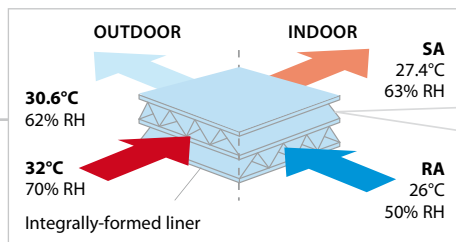

RH: Relative Humidity SA: Supply Air (to room) RA: Return Air (from room)

Ventilation			VAM/VAM	150FC	250FC	350J	500J	650J	800J	1000J	1500J	2000J			
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.097/0.070/0.039	0.164/0.113/0.054	0.247/0.173/0.081	0.303/0.212/0.103	0.416/0.307/0.137	0.548/0.384/0.191	0.833/0.614/0.273		
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.085/0.061/0.031	0.148/0.100/0.045	0.195/0.131/0.059	0.289/0.194/0.086	0.417/0.300/0.119	0.525/0.350/0.156	0.835/0.600/0.239		
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			%	770(1)/720(2)/783(1)/723(2)/828(1)/732(2)	749(1)/695(2)/760(1)/700(2)/801(1)/720(2)	85.1/86.7/90.1	80.0/82.5/87.6	84.3/86.4/90.5	82.5/84.2/87.7	79.6/81.8/86.1	83.2/84.8/88.1	79.6/81.8/86.1		
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		%	60.3(1)/61.9(1)/67.3(1)	60.3(1)/61.2(1)/64.5(1)	65.2/67.9/74.6	59.2/61.8/69.5	59.2/63.8/73.1	67.7/70.7/76.8	62.6/66.4/74.0	68.9/71.8/77.5	62.6/66.4/74.0		
	Heating	Ultra high/High/Low		%	66.6(1)/67.9(1)/72.4(1)	66.6(1)/67.4(1)/70.7(1)	75.5/77.6/82.0	69.0/72.2/78.7	73.1/76.3/82.7	72.8/75.3/80.2	68.6/71.7/77.9	73.8/76.1/80.8	68.6/71.7/77.9		
Operation mode	Heat exchange mode, bypass mode, fresh-up mode														
Heat exchange system	Air to air cross flow total heat (sensible + latent heat) exchange														
Heat exchange element	Specially processed non-flammable paper														
Dimensions	Unit	HeightxWidthxDepth	mm	285x776x525			301x1,120x868		368x1,350x917		368x1,350x1,170		731x1,350x1,170		
Weight	Unit		kg	24.0			46.5		61.5		79.0		157		
Casing	Material			Galvanised steel plate											
Fan	Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	m <sup>3</sup> /h	150/140/105	250/230/155	350(1)/300(1)/200(1)	500(1)/425(1)/275(1)	650(1)/550(1)/350(1)	800(1)/680(1)/440(1)	1,000(1)/850(1)/550(1)	1,500(1)/1,275(1)/825(1)	2,000(1)/1,700(1)/1,100(1)		
		Bypass mode	Ultra high/High/Low	m <sup>3</sup> /h	150/140/105	250/230/155	350(1)/300(1)/200(1)	500(1)/425(1)/275(1)	650(1)/550(1)/350(1)	800(1)/680(1)/440(1)	1,000(1)/850(1)/550(1)	1,500(1)/1,275(1)/825(1)	2,000(1)/1,700(1)/1,100(1)		
	External static pressure - 50Hz	Ultra high/High/Low	Pa	90/87/40	70/63/25	90(1)/70.0/50.0(1)									
Air filter	Type			Multidirectional fibrous fleeces				Multidirectional fibrous fleeces (G3)							
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low	dBA	27.0/26.0/20.5	28.0/26.0/21.0	34.5(1)/32.0(1)/29.0(1)	37.5(1)/35.0(1)/30.5(1)	39.0(1)/36.0(1)/31.0(1)	39.0(1)/36.0(1)/30.5(1)	42.0(1)/38.5(1)/32.5(1)	42.0(1)/39.0(1)/33.5(1)	45.0(1)/41.5(1)/36.0(1)			
	Bypass mode	Ultra high/High/Low	dBA	27.0/26.5/20.5	28.0/27.0/21.0	34.5(1)/32.0(1)/28.0(1)	38.0(1)/35.0(1)/29.5(1)	38.0(1)/34.5(1)/30.5(1)	40.0(1)/36.5(1)/30.5(1)	42.5(1)/40.0(1)/32.5(1)	42.0(1)/39.0(1)/32.5(1)	45.0(1)/41.0(1)/35.0(1)			
Operation range	Around unit		°CDB	-				0°C~40°CDB, 80% RH or less							
Connection duct diameter			mm	100	150	200	250				2x250				
Power supply	Phase/Frequency/Voltage		Hz/V	15.0				1~/50/60/220-240/220							
Current	Maximum fuse amps (MFA)		A	15.0				16.0							
Specific energy consumption (SEC)	Cold climate		kWh/(m <sup>2</sup> ·a)	-56.0(5)				-							
	Average climate		kWh/(m <sup>2</sup> ·a)	-22.1(5)				-							
	Warm climate		kWh/(m <sup>2</sup> ·a)	-0.100(5)				-5.30(5)							
SEC class			D / See note 5	B / See note 5				-							
Maximum flow rate at 100 Pa ESP	Flow rate		m <sup>3</sup> /h	130	207	-									
	Electric power input		W	129	160	-									
Sound power level (Lwa)			dB	40	43	51	54	58	61	62	65				
Annual electricity consumption			kWh/a	18.9(5)	13.6(5)	-									
Annual heating saved	Cold climate		kWh/a	41.0(5)	40.6(5)	-									
	Average climate		kWh/a	80.2(5)	79.4(5)	-									
	Warm climate		kWh/a	18.5(5)	18.4(5)	-									

(1)Measured according to JIS B 8628 | (2)Measured at reference flow rate according to EN13141-7 | Measured according to EN308 : 1997 | In accordance with commission regulation (EU) No 1254/2014 | In accordance with commission regulation (EU) No 1253/2014 | At reference flow rate in accordance with commission regulation (EU) No 1254/2014 | Clean the filter when the filter icon appears on the controller screen. Regular filter cleaning is important for delivered air quality and for the unit's energy efficiency.