


Wall mounted unit

Wall mounted unit providing high efficiency and comfort down to -25°C

- › Guaranteed heating capacity at low ambient temperature, down to -25°C
- › The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- › Seasonal efficiency values: full range A++ in cooling and heating
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Space saving contemporary wall mounted design
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces

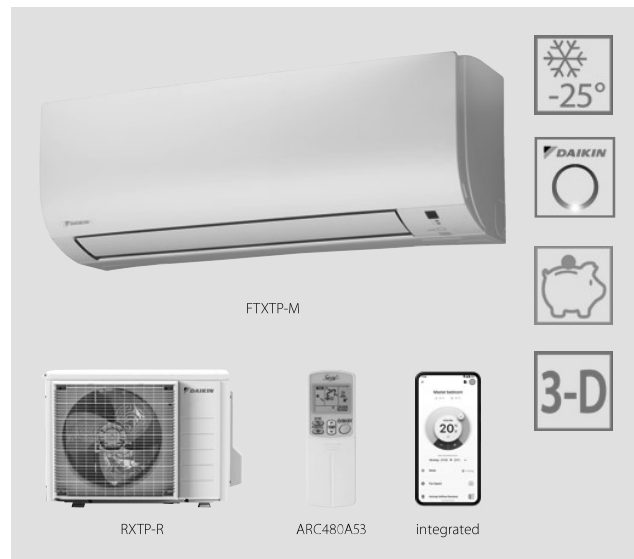

More details and final information can be found by scanning or clicking the QR codes.



FTXTP-M



RXTP-R

Efficiency data		FTXTP + RXTP		25M + 25R		35M + 35R	
Cooling capacity	Min./Nom./Max.	kW		0.80/2.50/4.00		0.80/3.50/4.40	
Heating capacity	Min./Nom./Max.	kW		1.20/3.20/6.20		1.20/4.00/6.70	
Power input	Cooling	Nom.	kW	0.57		0.92	
	Heating	Nom.	kW	0.65		0.90	
Space cooling	Energy efficiency class			A++			
	Capacity	Pdesign	kW	2.50		3.50	
	SEER			7.10		7.20	
	Annual energy consumption		kWh/a	123		170	
Space heating (Average climate)	Energy efficiency class			A++			
	Capacity	Pdesign	kW	2.50		3.00	
	SCOP/A			4.93		4.81	
	Annual energy consumption		kWh/a	710		873	
Space heating (Cold climate)	Energy efficiency class			A++			
	Capacity	Pdesign	kW	3.65		4.38	
	Annual energy consumption		kWh/a	1,941		2,394	
	SCOP/C			3.95		3.84	
Nominal efficiency	EER			4.40		3.80	
	COP			4.95		4.44	
	Annual energy consumption		kWh	284		461	
	Energy labeling Directive Cooling/Heating				A/A		
Indoor unit		FTXTP		25M		35M	
Dimensions	Unit	HeightxWidthxDepth		mm		286x770x225	
Weight	Unit			kg		9.00	
Air filter	Type					Removable/washable	
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m ³ /min		3.9/5.5/8.3/11.5	
		Heating	Silent operation/ Low/Medium/High	m ³ /min		4.5/5.6/8.7/11.5	
Sound power level	Cooling			dBA		58	
	Heating			dBA		58	
Sound pressure level	Cooling	Silent operation/Low/High		dBA		21/26/43	
	Heating	Silent operation/Low/High		dBA		21/26/43	
Control systems	Infrared remote control				ARC480A53		
Outdoor unit		RXTP		25R		35R	
Dimensions	Unit	HeightxWidthxDepth		mm		551x763x312	
Weight	Unit			kg		38	
Sound power level	Cooling	Nom.		dBA		61.0	
	Heating	Nom.		dBA		61.0	
Sound pressure level	Cooling	Nom.		dBA		48	
	Heating	Nom.		dBA		49	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~-46	
	Heating	Ambient	Min.~Max.	°CWB		-25~-18	
Refrigerant	Type			R-32			
	GWP			675			
	Charge			kg/TCO ₂ Eq		1.1/0.75	
Piping connections	Liquid	OD		mm		6.35	
	Gas	OD		mm		9.50	
	Piping length	OU - IU	Max.	m		20	
	Additional refrigerant charge			kg/m		0.02 (for piping length exceeding 10m)	
	Level difference	IU - OU	Max.	m		15	
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50 /220-240		
Current - 50Hz	Maximum fuse amps (MFA)		A		16		

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data | Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m (horizontal) | Contains fluorinated greenhouse gases