

Wall mounted unit

FTXTA-BW + RXTA-B



BLUEVOLUTION stylish



Guaranteed operation down to -25°C



Fireplace logic



Coanda effect - heating



Heat boost




Daikin Residential Controller

Where innovation meets creativity, even at ambient temperatures down to -25°C

- › Guaranteed heating capacity down to -25°C
- › Even temperature distribution thanks to fireplace logic
- › Compact design in matt crystal white
- › Perfect temperature distribution thanks to Coanda effect
- › Intelligent thermal sensor: air flow is adjusted when detecting temperature differences
- › Daikin residential controller via app
- › Voice control

- › Bluevolution range: lower environmental impact
- › Seasonal efficiency values up to A+++ in cooling and heating
- › Daikin Flash Streamer technology: powerful air purification
- › Practically inaudible
- › Heat boost: fast heating during start-up (pair only)

FTXTA-BW + RXTA-B

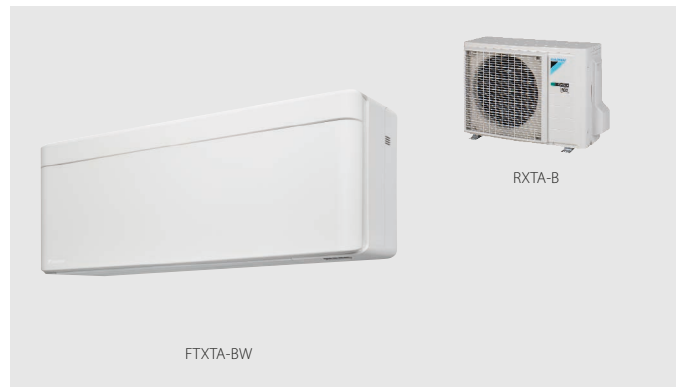

Indoor unit		FTXTA		30BW	
Dimensions	Unit	HeightxWidthxDpth	mm	295 x798 x189	
Weight	Unit		kg	11.5	
Air filter	Type			Removable / washable	
Fan	Air flow rate	Cooling	Silent operation/Low/ Medium/High	m ³ /min	
		Heating	Silent operation / Low / Medium / High	m ³ /min	
				4.6 /5.7 /8.3 /11.9	
Sound power level	Cooling		dBA	60	
	Heating		dBA	60	
Sound pressure level	Cooling	Silent operation/Low/High	dBA	20 /25 /43	
	Heating	Silent operation/Low/High	dBA	19 /24 /41	
Control systems	Infrared remote control			ARC466A59	
	Wired remote control			BRC073A4	

Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | See separate drawing for electrical data


Outdoor unit		RXTA		30B	
Dimensions	Unit	HeightxWidthxDpth	mm	551 x763 x312	
Weight	Unit		kg	38	
Sound power level	Cooling		dBA	61	
Sound pressure level	Cooling	Nom.	dBA	48	
	Heating	Nom.	dBA	49	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	
	Heating	Ambient	Min.~Max.	°CWB	
				-10 ~46	
Refrigerant	Type			R-32	
	GWP			675	
Piping connections	Liquid	OD	mm	6.35	
	Gas	OD	mm	9.50	
	Piping length	OU - IU	Max.	m	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)	
	Level difference	IU - OU	Max.	m	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	16	

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data

Efficiency data		FTXTA + RXTA		30BW + 30B	
Cooling capacity	Min./Nom./Max.		kW	0.70 /3.00 /4.50	
Heating capacity	Min./Nom./Max.		kW	0.80 /3.20 /6.90	
Power input	Cooling	Nom.	kW	0.71	
	Heating	Nom.	kW	0.66	
Space cooling	Energy efficiency class			A++	
	Capacity	Pdesign	kW	3.00	
	SEER			7.63	
	Annual energy consumption		kWh/a	138	
Space heating (Average climate)	Energy efficiency class			A+++	
	Capacity	Pdesign	kW	2.60	
	SCOP/A			5.10	
	Annual energy consumption		kWh/a	714	
Space heating (Cold climate)	Energy efficiency class			A+	
	Capacity	Pdesignh	kW	3.80	
	Annual energy consumption		kWh/a	1,946	
	SCOP/C			4.10	
Nominal efficiency	EER			4.20	
	COP			4.87	
	Annual energy consumption		kWh	357	
	Energy labeling Directive	Cooling/Heating		A/A	

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range

Daikin Europe N.V. Naamloze Venootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN21-062

06/2021



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.